BookletChartTM






A reduced-scale NOAA nautical chart for small boaters When possible, use the full-size NOAA chart for navigation.



- Complete, reduced-scale nautical chart
- Print at home for free
- Convenient size
- Up-to-date with Notices to Mariners
- Compiled by NOAA's Office of Coast Survey, the nation's chartmaker

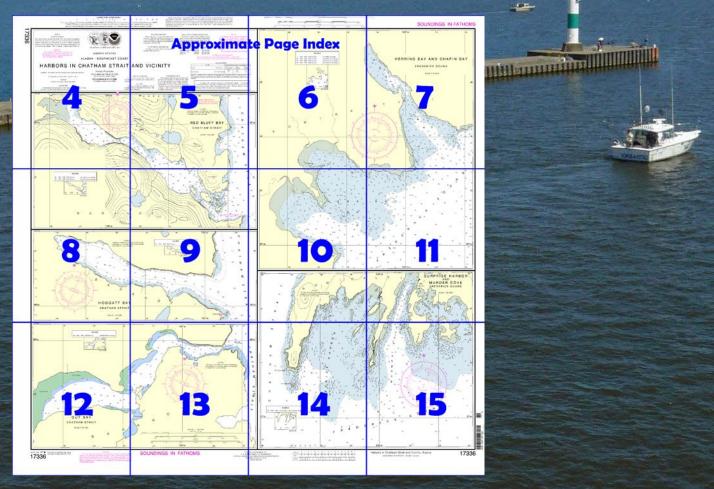

Published by the National Oceanic and Atmospheric Administration National Ocean Service Office of Coast Survey

<u>www.NauticalCharts.NOAA.gov</u> 888-990-NOAA

What are Nautical Charts?

Nautical charts are a fundamental tool of marine navigation. They show water depths, obstructions, buoys, other aids to navigation, and much more. The information is shown in a way that promotes safe and efficient navigation. Chart carriage is mandatory on the commercial ships that carry America's commerce. They are also used on every Navy and Coast Guard ship, fishing and passenger vessels, and are widely carried by recreational boaters.

What is a BookletChart[™]?

This BookletChart is made to help recreational boaters locate themselves on the water. It has been reduced in scale for convenience, but otherwise contains all the information of the full-scale nautical chart. The bar scales have also been reduced, and are accurate when used to measure distances in this BookletChart. See the Note at the bottom of page 5 for the reduction in scale applied to this chart.

Whenever possible, use the official, full scale NOAA nautical chart for navigation. Nautical chart sales agents are listed on the Internet at http://www.NauticalCharts.NOAA.gov.

This BookletChart does NOT fulfill chart carriage requirements for regulated commercial vessels under Titles 33 and 44 of the Code of Federal Regulations.

Notice to Mariners Correction Status

This BookletChart has been updated for chart corrections published in the U.S. Coast Guard Local Notice to Mariners, the National Geospatial Intelligence Agency Weekly Notice to Mariners, and, where applicable, the Canadian Coast Guard Notice to Mariners. Additional chart corrections have been made by NOAA in advance of their publication in a Notice to Mariners. The last Notices to Mariners applied to this chart are listed in the Note at the bottom of page 7. Coast Pilot excerpts are not being corrected.

For latest Coast Pilot excerpt visit the Office of Coast Survey website at http://www.nauticalcharts.noaa.gov/nsd/searchbychart.php?chart=173 https://www.nauticalcharts.noaa.gov/nsd/searchbychart.php?chart=173 https://www.nauticalcharts.noaa.gov/nsd/searchbychart.php?chart=173 https://www.nauticalcharts.noaa.gov/nsd/searchbychart.php?chart=173 https://www.nauticalcharts.noaa.gov/nsd/searchbychart.php?chart=173 https://www.nauticalcharts.noaa.gov/nsd/searchbychart.php?chart=173 https://www.nauticalcharts.noaa.gov/nsd/searchbychart.php?chart=173 <a href="https://www.nauticalcharts.noaa.gov/nsd/searchbycharts.noaa.gov/nsd/search



(Selected Excerpts from Coast Pilot)
Walker Point, about 2.4 miles ENE of
Point Gardner Light, is the end of a low
peninsula separating Murder Cove from a
foul bight E of it. Ledges and kelp surround
the point to a distance of 0.2 mile.
Bartlett Point is the end of a long, low,
wooded strip separating Murder Cove
from Surprise Harbor; the end of the point
is two wooded islands joined by dry
ledges. A bare ledge extends 300 yards S,
and foul ground marked by kelp and

shoaling to $\frac{1}{2}$ fathom extends 0.5 mile SE and SW of the point, and more than halfway across Surprise Harbor.

Murder Cove has its entrance between Bartlett Point and Walker Point, 2 miles E of Point Gardner. The channel narrows to 300 yards 0.4 mile inside the entrance, between a bare ledge on the E and two rocks, each with a clump of scrub, on the W. Above this point the channel has a width of about 200 yards between kelp-marked ledges, and it is best to enter at low water when the dangers show. The tide rips are sometimes heavy across the entrance when the wind is strong against the current. Point Gardner, the S extremity of Admiralty Island, is low and has two rocks 20 to 30 feet high, 600 yards S of the point. The W of the two rocks is marked by Point Gardner Light (57°00'36"N. 134°36'58"W.), 65 feet above the water and shown from a skeleton tower with a red and white diamond-shaped daymark. A prominent mound is 0.2 mile NNE from the point, and a conspicuous round hill is 1.3 miles NNE from the point. The water is clear 0.2 mile from the rocks off the point, but the rocks should be given a berth of 0.5 mile to avoid frequent tide rips.

Surprise Harbor, on the E side of Point Gardner, is open S, has much kelp, and is not a good anchorage. It is, however, a good lee when the wind is blowing strong down Chatham Strait.

To enter, keep from 0.2 to 0.5 mile off the W shore, using caution and avoiding kelp. Anchor about midharbor in 7 fathoms, rocky bottom.

Chapin Bay is a small inlet on the N side of Frederick Sound, and on the SW side of Point Napean (57°08.5'N., 134°17.5'W.), affording secure anchorage in 9 to 11 fathoms, sandy bottom. A reef, marked by kelp, with a least depth of 1.8 fathoms in 57°07'47"N., 134°19'09"W., is 0.6 mile NE from the W point at the entrance. A ledge, bare at half tide, is 330 yards SW from the N point at the entrance, and kelp shows about 400 yards S of the ledge. There is also kelp in the middle of the channel, about 0.8 mile inside the entrance, and a shoal extends 150 yards E from the point on the W side of the S entrance to the narrows.

It is safest to enter Chapin Bay at low water. Enter about 400 yards SW

It is safest to enter Chapin Bay at low water. Enter about 400 yards SW of the half-tide ledge off the N point at the entrance and keep the N shore aboard at 200 yards until in the narrows. A midchannel course leads safely to the anchorage in the basin above the narrows.

Herring Bay, 10 miles NE of Point Gardner Light, has its entrance between Point Brightman and the point to the N that separates Herring Bay from Chapin Bay. A tongue of land, prolonged by rocks, reefs, and kelp patches, extends in a SE direction, dividing the bay into two parts. There is a fair anchorage, open to the SE, in the SW corner of the bay, about 0.8 mile from the head. To make this anchorage, follow the S shore at a distance of about 0.4 mile, the chart being the guide.

Gut Bay is on the W side of Chatham Strait, about 34.5 miles N of Cape Ommaney. At 0.3 mile E of the narrow entrance and 300 yards from the S side is a rocky patch with 4½ fathoms; vessels should pass N of it. The entrance is about 100 yards wide with bold shores. The sides are bluff, bold, and rocky, in some places almost perpendicular. On the S side, 2.5 miles from the entrance, is the narrow opening of a little bay, between high ridges, with a depth of ¾ fathom. Small craft can enter this bay at high water and anchor in about 3 fathoms.

Hoggatt Bay is about 2 miles N of Gut Bay and extends back into the mountains of Baranof Island. The sides are steep and bold and the water deep, over 100 fathoms through the middle. **Hoggatt Bay Light** (56º45′51″N., 134º39′22″W.), 40 feet above the water, is shown from a skeleton tower with a red and white diamond-shaped daymark on the S side of the entrance to the bay.

U.S. Coast Guard Rescue Coordination Center 24 hour Regional Contact for Emergencies

RCC Juneau Commander

17th CG District (907) 463-2000 Juneau, Alaska

2

Corrected through NM Mar. 03/07 Corrected through LNM Feb. 13/07

HEIGHTS

Heights in feet above Mean High Water.

Mercator Projections

North American Datum of 1983 (World Geodetic System 1984)

SOUNDINGS IN FATHOMS

AT MEAN LOWER LOW WATER

LOCAL MAGNETIC DISTURBANCE

Differences of as much as 5° from the no

HORIZONTAL DATUM

The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84) Geographic positions referred to the North American Datum of 1927 must be corrected an average of 1.228" southward and 6.293" westward to agree with this chart.

CAUTION

Shoreline charted from 2003 data. Contemporary hydrography is not available. Mariners are advised to navigate with local knowledge.

WARNING

The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

For Symbols and Abbreviations see Chart No. 1

CAUTION

Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

NOTE A

Navigation regulations are published in
Chapter 2, U.S. Coast Pilot 8. Additions or
revisions to Chapter 2 are published in the
Notice to Mariners. Information concerning
the regulations may be obtained at the Office
of the Commander, 17th Coast Guard District
in Juneau, Alaska, or at the Office of the District
Engineer, Corps of Engineers in Anchorage,
Alaska Alaska.

Refer to charted regulation section numbers

AIDS TO NAVIGATION

Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

NOAA WEATHER RADIO BROADCASTS

The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Mt. McArthur, AK KZZ-95 Mt. Robert Barron, AK KZZ-87 Cape Fanshaw, AK KZZ-88 Sukkwan I, AK KZZ-89 162.450 MHz 162.425 MHz Sukkwan I, AK 162.425 MHz

POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

CAUTION

Shoreline charted from 2003 data. Contemporary hydrography is not available. Mariners are advised to navigate with local knowledge.

CAUTION

Shoreline charted from 2003 data, Contemporary hydrography is not available. Mariners are advised to navigate with local knowledge.

CAUTION

Shoreline charted from 2003 data. Contemporary hydrography is not available. Mariners are advised to navigate with local knowledge.

Table of Selected Chart Notes

Hydrography and topography by the National Ocean Service, Coas Survey, with additional data from the U.S. Coast Guard

NOTE B

SOURCE DIAGRAM

The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

COLREGS, 80,1705 (see note A

International Regulations for Preventing Collisions at Sea, 1972. The entire area of this chart falls seaward of the COLREGS Demarcation Lin

TIDAL INFORMATION					
	PLACE		Height referred to datum of soundings (MLLW)		
	NAME	(LAT/LONG)	Mean Higher High Water	Mean High Water	Mean Low Water
			feet	feet	feet
	Red Bluff Bay	(56°51'N/134°43'W)	12.7	11.8	1.6

Dashes (---) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from http://tidesandcurrents nosa.gov. (Jan 2007)

17336

NOTE B

SOURCE DIAGRAM

The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, <u>United States Coast Pilot.</u>

WARNING

The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.



THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES

ALASKA - SOUTHEAST COAST

POLLUTION REPORTS

Report all spills of oil and hazardous stances to the National Response Cente 1-800-424-880 (foll free), or to the nearest Coast Guard facility if telephone communica is impossible (33 CFR 153).

SUPPLEMENTAL INFORMATION

Consult U.S. Coast Pilot 8 for impo supplemental information.

HARBORS IN CHATHAM STRAIT AND VICINITY

Additional information can be obtained at nauticalcharts.noaa.gov.

For Symbols and Abbreviations see Chart No. 1

HEIGHTS

Heights in feet above Mean High Water.

AUTHORITIES

Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the U.S. Coast Guard.

Mercator Projections

North American Datum of 1983 (World Geodetic System 1984)

SOUNDINGS IN FATHOMS
AT MEAN LOWER LOW WATER

AIDS TO NAVIGATION

Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

CAUTION


Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

HORIZ


Edition


help@


The horizontal re is North American Da for charting purpos to the World Geode Geographic posit American Datum of average of 1.228" so to agree with this cl

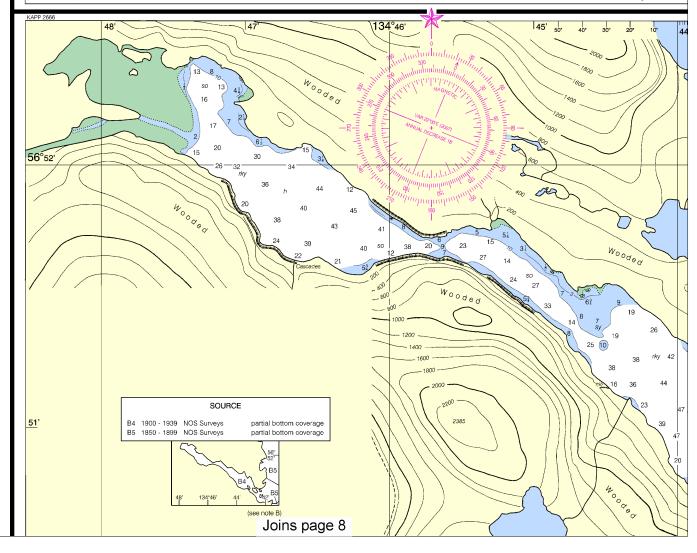





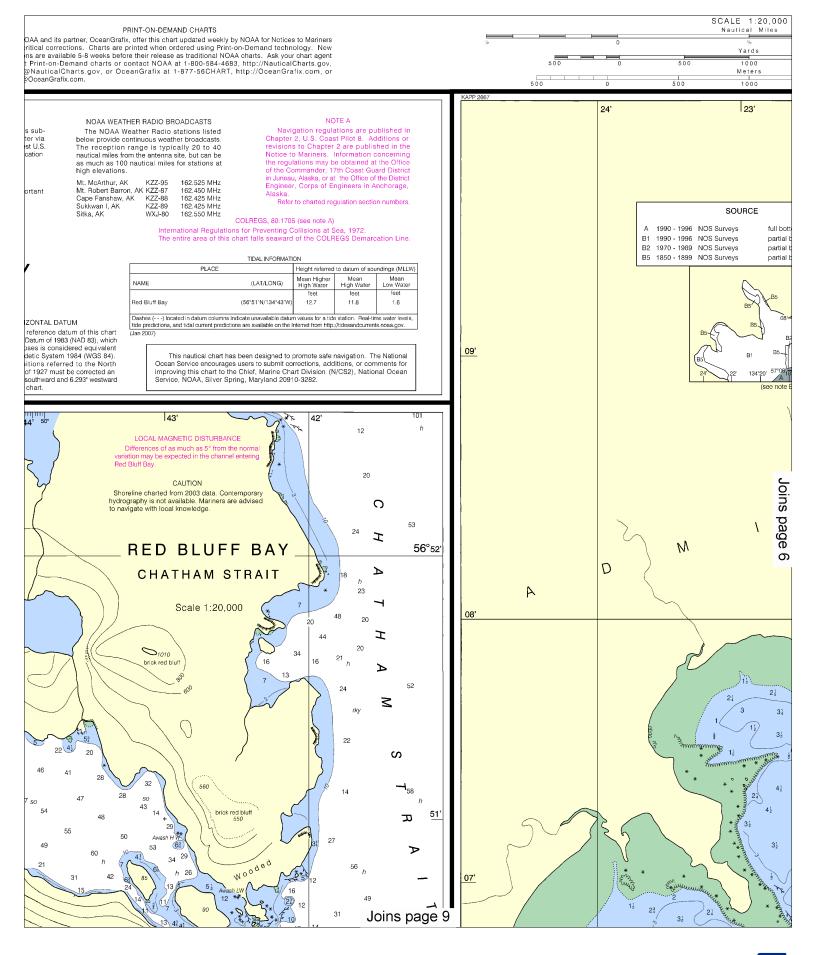


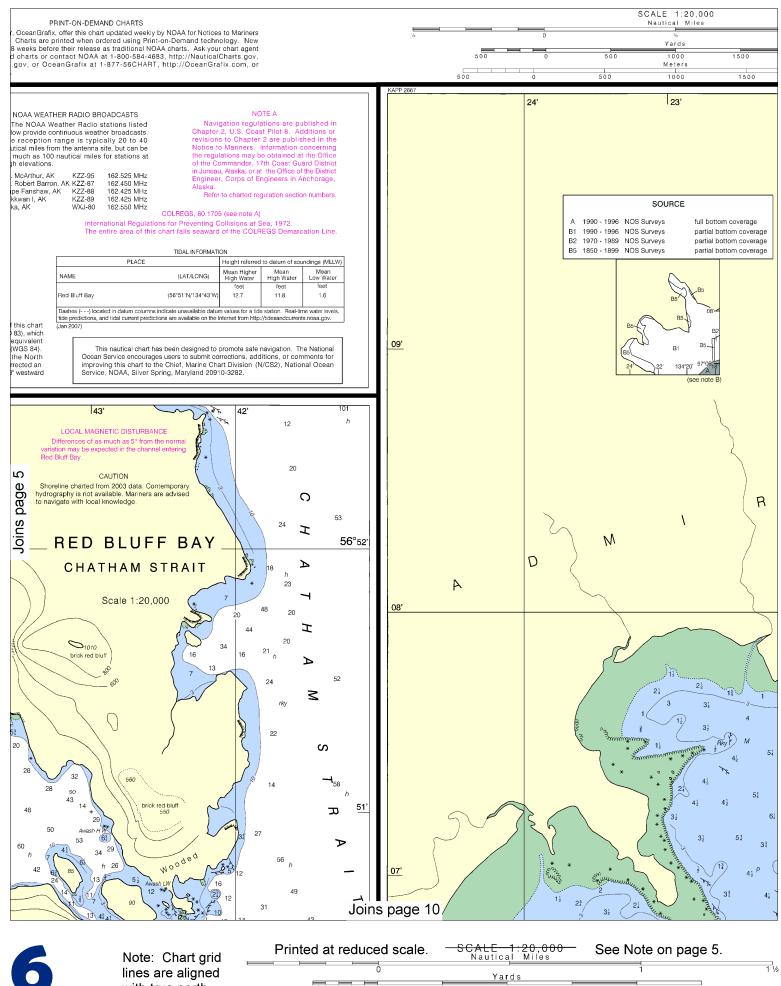





with true north.



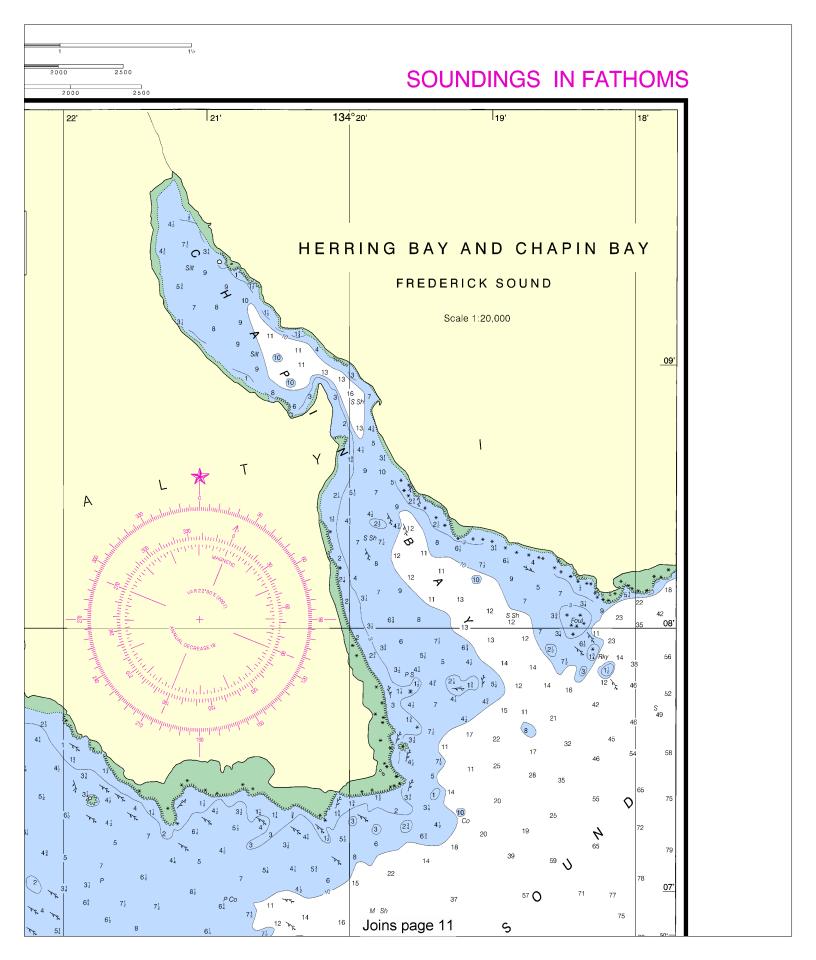





Canadian Coast Guard Notice to Mariners: 0912 9/28/2012.

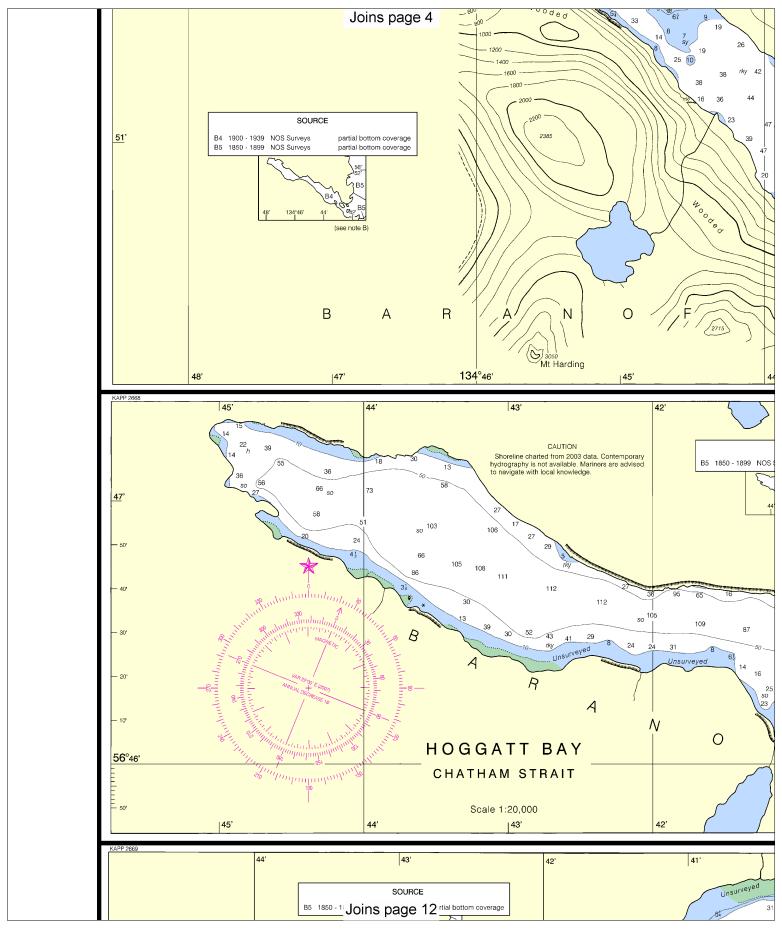






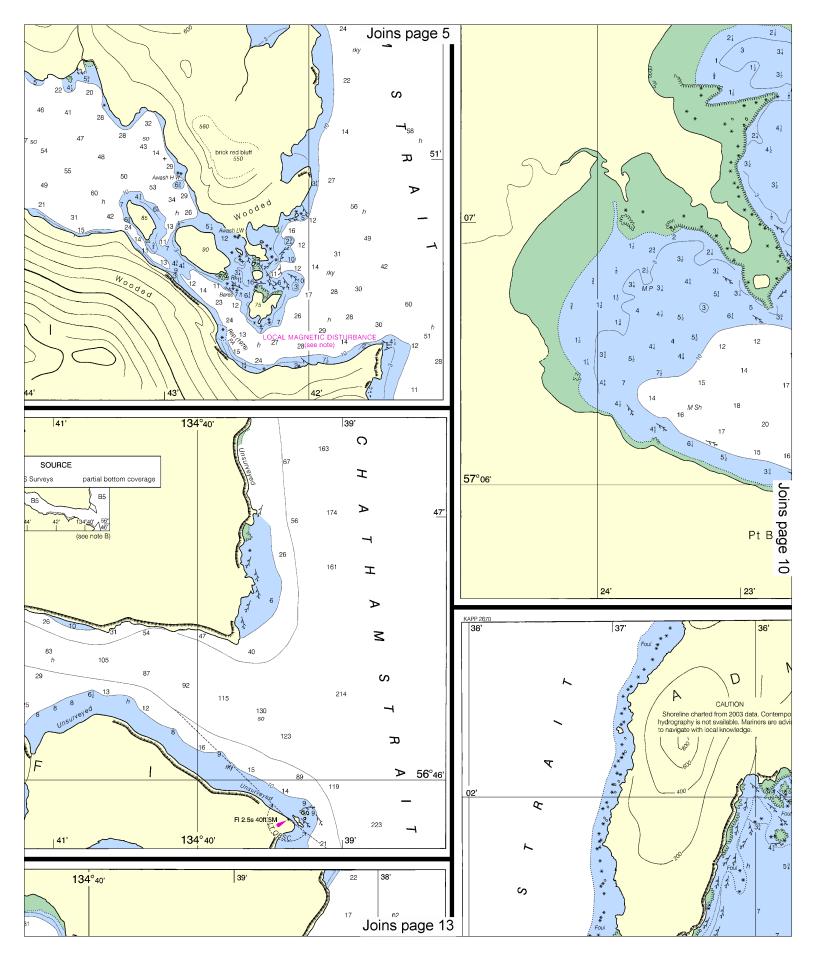


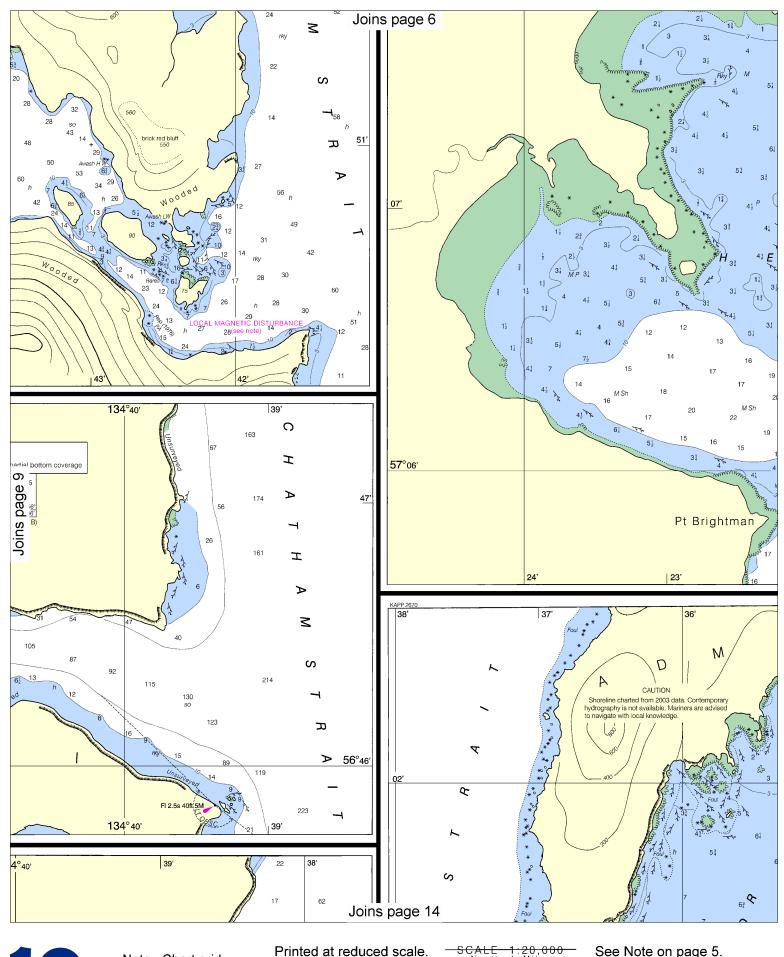

10




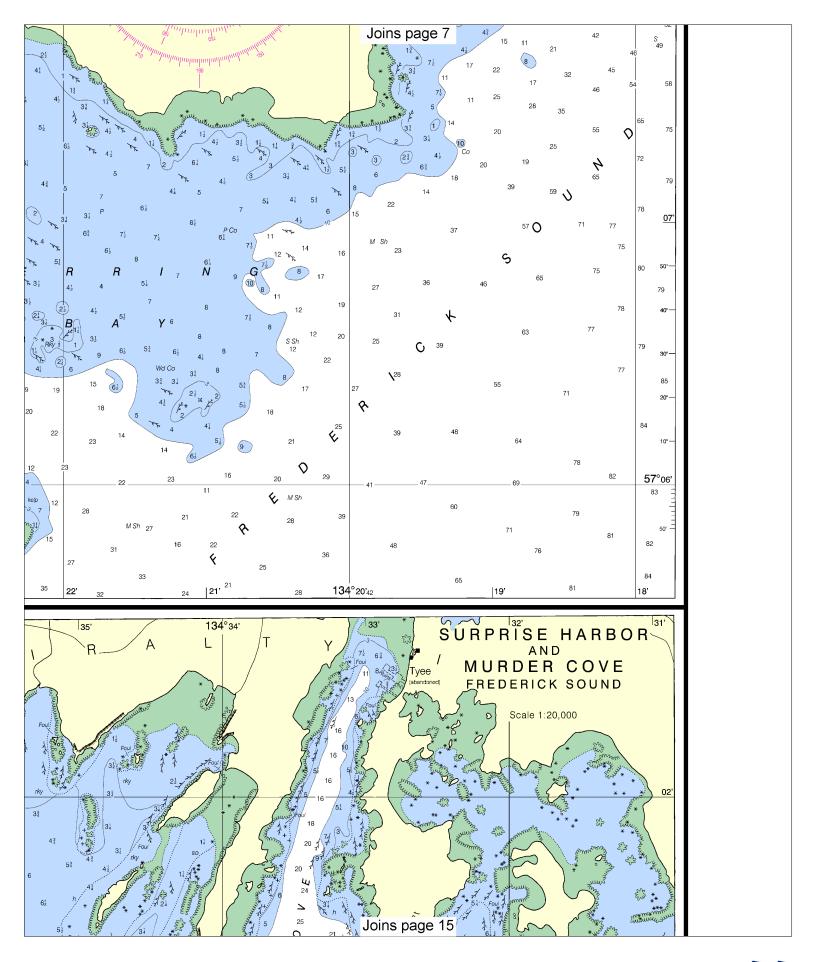


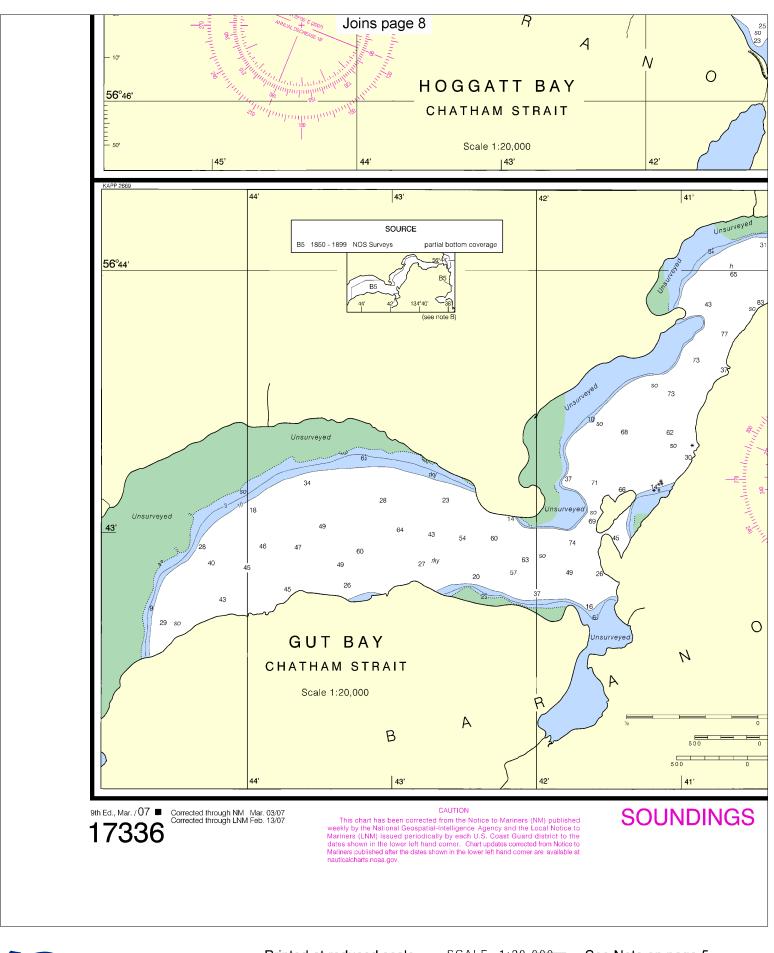






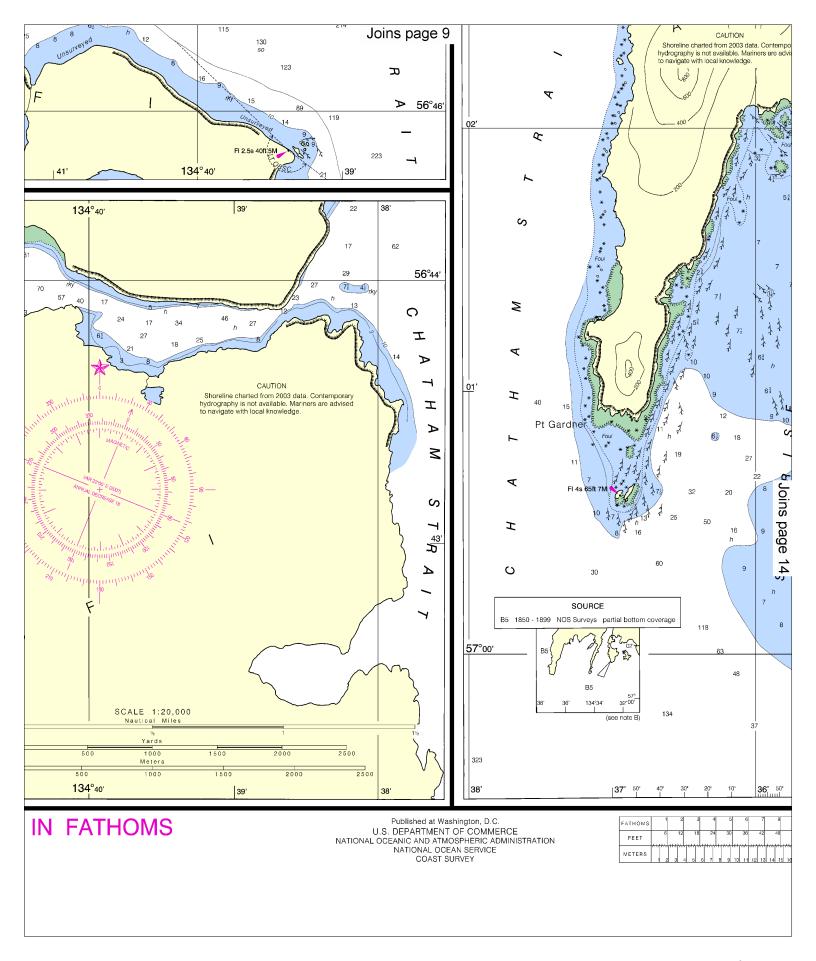

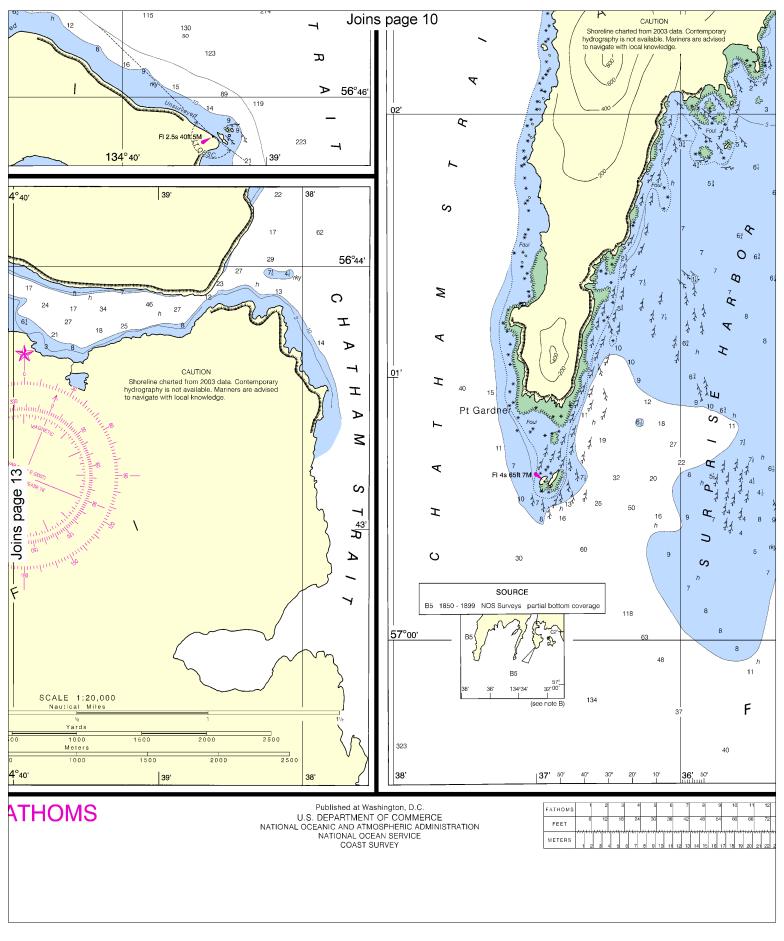

14



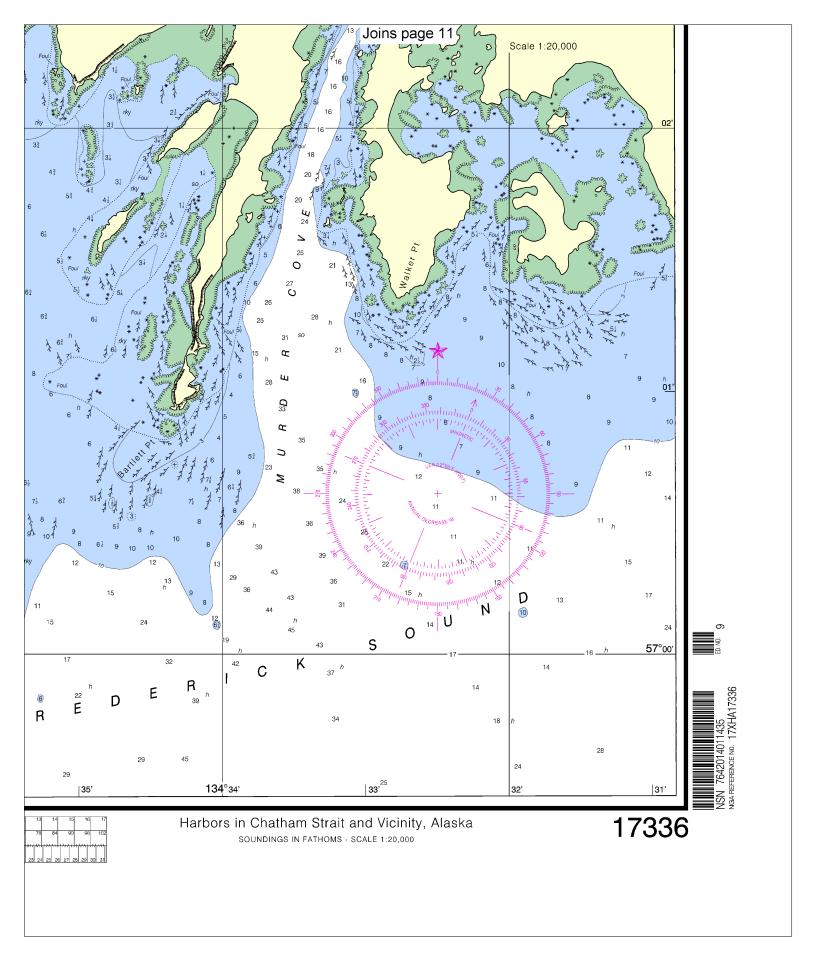



VHF Marine Radio channels for use on the waterways:

Channel 6 – Inter-ship safety communications.

Channel 9 – Communications between boats and ship-to-coast.

Channel 13 – Navigation purposes at bridges, locks, and harbors.

Channel 16 – Emergency, distress and safety calls to Coast Guard and others, and to initiate calls to other

vessels. Contact the other vessel, agree to another channel, and then switch.

Channel 22A – Calls between the Coast Guard and the public. Severe weather warnings, hazards to navigation and safety warnings are broadcast here. Channels 68, 69, 71, 72 and 78A – Recreational boat channels.

Getting and Giving Help — Signal other boaters using visual distress signals (flares, orange flag, lights, arm signals); whistles; horns; and on your VHF radio. You are required by law to help boaters in trouble. Respond to distress signals, but do not endanger yourself.

Distress Call Procedures

- Make sure radio is on.
- Select Channel 16.
- Press/Hold the transmit button.
- Clearly say: "MAYDAY, MAYDAY, MAYDAY."
- Also give: Vessel Name and/or Description; Position and/or Location; Nature of

Emergency; Number of People on Board.

- · Release transmit button.
- Wait for 10 seconds If no response Repeat MAYDAY call.

HAVE ALL PERSONS PUT ON LIFE JACKETS!



NOAA Weather Radio All Hazards (NWR) is a nationwide network of radio stations broadcasting continuous weather information directly from the nearest National Weather Service office. NWR broadcasts official Weather Service warnings, watches, forecasts and other hazard information 24 hours a day, 7 days a week.

http://www.nws.noaa.gov/nwr/

Quick References

Nautical chart related products and information — http://www.nauticalcharts.noaa.gov

Online chart viewer — http://www.nauticalcharts.noaa.gov/mcd/NOAAChartViewer.html

Report a chart discrepancy — http://ocsdata.ncd.noaa.gov/idrs/discrepancy.aspx

Chart and chart related inquiries and comments — http://ocsdata.ncd.noaa.gov/idrs/inquiry.aspx?frompage=ContactUs

Chart updates (LNM and NM corrections) — http://www.nauticalcharts.noaa.gov/mcd/updates/LNM_NM.html

Coast Pilot online — http://www.nauticalcharts.noaa.gov/nsd/cpdownload.htm

Tides and Currents — http://tidesandcurrents.noaa.gov

Marine Forecasts — http://www.nws.noaa.gov/om/marine/home.htm

National Data Buoy Center — http://www.ndbc.noaa.gov/

NowCoast web portal for coastal conditions — http://www.nowcoast.noaa.gov/

National Weather Service — http://www.weather.gov/

National Hurrican Center — http://www.nhc.noaa.gov/

Pacific Tsunami Warning Center — http://ptwc.weather.gov/

Contact Us — http://www.nauticalcharts.noaa.gov/staff/contact.htm



For the latest news from Coast Survey, follow @nauticalcharts



This Booklet chart has been designed for duplex printing (printed on front and back of one sheet). If a duplex option is not available on your printer, you may print each sheet and arrange them back-to-back to allow for the proper layout when viewing.

